

# Black Design



Solutions for swing shower door  
Solutions pour porte battante de douche

**ASSA ABLOY**


The global leader in door  
opening solutions\*


\*Leader mondial  
de la sécurisation des accès

# Solutions for swing shower door

## Solutions pour porte battante de douche

### The + products Les + produits

- Patented system 
- New design
- Patented precise adjustment of the door angle
- Patented anti-noise system
- For doors up to 45kg
- Opening through 180°
- Centered pivot-point, possible swing door
- High quality finishes
- Tested according to the standard EN 1670 grade 5
- 5 years warranty

- Systèmes brevetés 
- Nouveau design
- Réglage précis de l'angle de la porte breveté
- Système anti-bruit breveté
- Pour porte jusqu'à 45kg
- Ouverture à 180°
- Point de rotation centré, va et vient possible
- Grande qualité de finitions
- Testé suivant la norme EN 1670 grade 5
- Garantie 5 ans



Bright chromium  
Chromé brillant



Matt chromium  
Chromé mat





Lacquered black velvet  
Laqué noir velour

Single adjustable hinge 90° blocking Charnière simple réglable blocage à 90°	<b>3760.30.0RSQ</b>	<b>3760.31.0RSQ</b>	<b>3760.74.0RSQV</b>
Glass to glass adjustable shower hinge 90° blocking point Charnière double verre/verre réglable blocage à 90°	<b>3762.30.0RSQ</b>	<b>3762.31.0RSQ</b>	<b>3762.74.0RSQ</b>
Glass to glass adjustable shower hinge 90° blocking point Charnière double d'angle 90° réglable	<b>3764.30.0RSQ</b>	<b>3764.31.0RSQ</b>	<b>3764.74.0RSQ</b>
Pair of square knob 30 x 30 mm Bouton double carré 30 x 30 mm	<b>3666.30.0</b>	<b>3666.31.0</b>	<b>3666.74.0</b>
Partition clip for fixed panel Pièce de fixation pour volume fixe	<b>3265.30.0SQ</b>	<b>3265.31.0SQ</b>	<b>3265.74.0SQ</b>
Articulated square reinforcement bar for shower glass/ wall 1200 mm length Barre raidisseur carrée articulée mur/verre lg 1200 mm	<b>1657.30.2SQ</b>	<b>1657.31.2SQ</b>	<b>1657.74.2SQ</b>
Vertical correcting profile length 2200 mm for fixed panel Profil de compensation lg 2200 mm pour volume fixe	<b>2818.30.3</b>	<b>2818.31.3</b>	<b>2818.74.3</b>
Bottom profile length 2200 mm for fixed panel Profil bas lg 2200 mm pour volume fixe	<b>2819.30.3</b>	<b>2819.31.3</b>	<b>2819.74.3</b>
Pair of knobs 40 mm Ø Bouton double épaulé Ø 40 mm			<b>3266.74.0</b>
U-profile 15x15x15x1.5 mm 12 mm inside width 2000 mm length Profil U 15x15x15x1.5 mm largeur intérieure 12 mm longueur de 2000 mm			<b>U151515L2.74</b>

1 3760.74.0RSQV

2 3762.74.0RSQ


3 3764.74.0RSQ

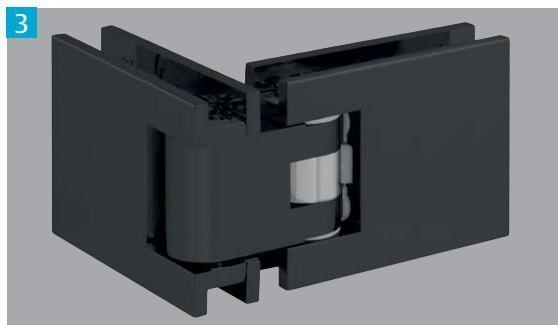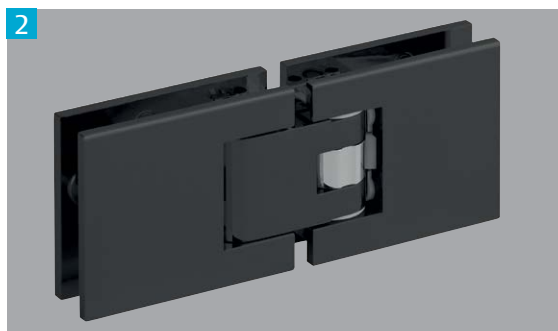

4 1657.74.2SQ




5 3666.74.0

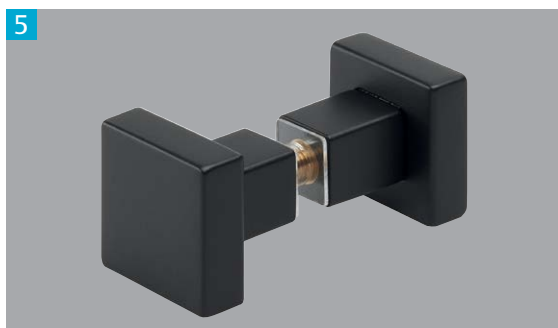


6 3265.74.0SQ

7 2818.74.3  
2819.74.3

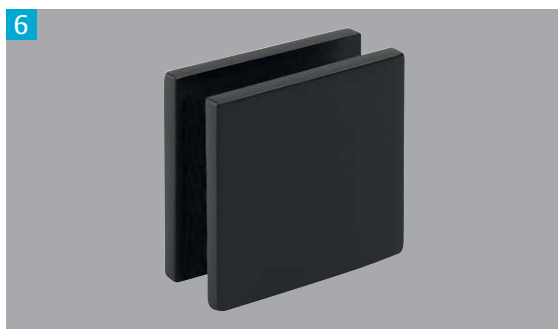

8 3266.74.0

9 U151515L2.74

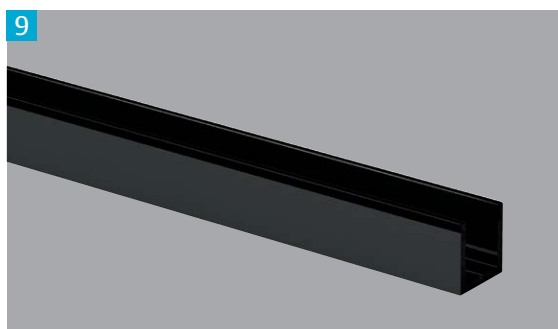

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience\*

\*ASSA ABLOY est le leader mondial des solutions d'accès destinées à répondre aux exigences de sécurité, de protection et de confort de l'utilisateur final

ASSA ABLOY GLASS  
Services administratifs  
rue Alexandre Fichet  
80460 Oust-Marest - France  
[www.assaabloy.fr/glass](http://www.assaabloy.fr/glass)

Administration des ventes (France)  
Tél : +33(0)1 39 46 11 88  
Fax : +33(0)3 22 23 28 01

Sales administration (International)  
Tél : +33(0)3 22 23 76 12  
Fax : +33(0)3 22 23 28 01

Relation Technique Clients  
Tél : +33(0)1 39 46 11 88  
[support.glass@assaabloy.com](mailto:support.glass@assaabloy.com)

Customer technical support  
Tél : +32(0)474 26 27 01  
[support.glass@assaabloy.com](mailto:support.glass@assaabloy.com)